


- NOTES:
1. ALL RESISTORS IN OHMS 1/2W UNLESS OTHERWISE SPECIFIED.
 2. ALL CAPACITORS IN MFD. AND 450V UNLESS OTHERWISE SPECIFIED.
 3. D.C. VOLTAGE READINGS WITH NO SIGNAL APPLIED USING A 20,000 OHM PER VOLT METER.
 4. NUMBERS IN PARENTHESES REFER TO AMPER'S PART NO.
 - 5.
 6. D.C. VOLTAGE READINGS ARE POSITIVE WITH RESPECT TO CIRCUIT GROUND UNLESS OTHERWISE SPECIFIED.
 7. CIRCUIT OF CIRCUITS NOT VARY SLIGHTLY FROM THAT SHOWN HERE DUE TO NORMAL PRODUCTION VARIATIONS.
 8. ALL VOLTAGES IN NOTES ARE A.C. AND ARE TAKEN WITH SWGS, TREBLE AND BASSMAN AT 000 POSITION, ALL FRONT PANEL ROCKER SWITCHES TO THE LEFT.

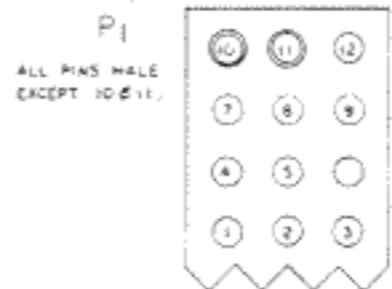

| | | | |
|---|---|---|---------------|
| REVISION AM-1624 8-1-75 BY: [Signature] CHECKED BY: [Signature] DATE: 8-2-75 | 7 X 10 1/2 X 5 1/2 R.L.D. SIZE PART NO. | THE AMPEG COMPANY DIVISION OF THE MAGNAVOX COMPANY 100 WEST 34TH STREET NEW YORK, N.Y. 10018 | |
| | ADDITIONAL SPECIFICATIONS | MATERIAL | FINISH |
| | THIS MATERIAL IS THE PROPERTY OF AMP AND IS LOANED TO THE MAGNAVOX COMPANY AND IS NOT TO BE REPRODUCED OR USED FOR OTHER THAN AUTHORIZED MAGNAVOX PURPOSES WITHOUT THE WRITTEN PERMISSION OF THE MAGNAVOX COMPANY. THE MATERIAL MUST BE RETURNED TO THE MAGNAVOX COMPANY WHEN THE MATERIAL NO LONGER REQUIRES USE FOR AUTHORIZED MAGNAVOX PURPOSES. | DATE: 8-2-75 BY: [Signature] | PART NO. 1624 |